

PIVOT

Deliver powerful cooling wherever you need it with Pivot. The most flexible Big Ass fan, it's capable of a virtually infinite number of speeds and positions. Wall-mount it to avoid obstructions or angle it down long aisles and let its quiet, efficient direct-drive motor create comfort where you never thought possible.



KEY FEATURES

- ▶ **Six aluminum airfoils** with winglets in a durable steel cage
- ▶ **Gearless direct-drive motor** and precision-molded hub for max efficiency
- ▶ **Suite of safety features** including airfoil retainers and aircraft cables
- ▶ **Smooth, quiet performance** with variable speed control
- ▶ **Powerful airflow** provides coverage up to 120 feet (37 meters) away
- ▶ **Direct airflow anywhere** with over 1,000 operational settings

DIAMETER

6.35 FEET
(1.9 METERS)

MOUNTING

**OVERHEAD BAR JOISTS,
I-BEAMS, AND VERTICAL COLUMNS**

VOLTAGE

**110-125 OR 200-240
MULTI-PHASE VAC**

WARRANTY

**UP TO
5 YEARS**





DISCOVER MORE ABOUT PIVOT


Learn more at bigassfans.com/pivot
or call **877.BIG.FANS** for a free custom quote.

PIVOT


THE BIG ASS FAN FOR HARD-TO-REACH PLACES

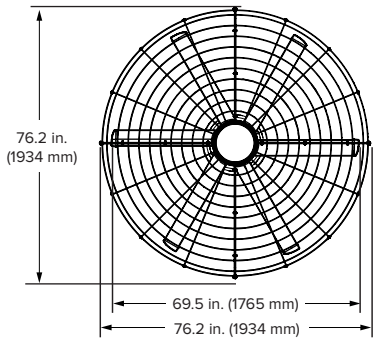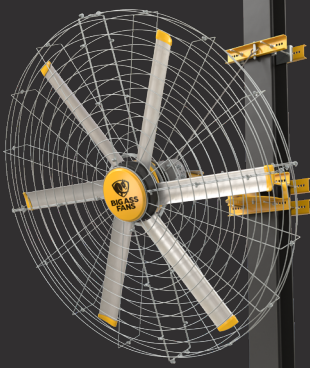


Fan Cage



Column Mount



Controller



Construction and Warranty

Cage and Mount	Motor	Controller	Safety Features	Mounting
Durable steel cage Pivoting joints	Gearless direct drive	Variable speed controller mounts to single-gang junction box or to wall	Airfoil retainers, safety cables, and guy wires	Overhead bar joists and I-beams Vertical columns

Electrical and Performance


Model Number	Supply Power ¹	Amperage	Max Speed	Max Power	Weight	Operating Temperature	Sound Level at Max Speed ²
F-PV2-0601	110–125 VAC, 1 Φ, 50/60 Hz, 15 A	7.8–7.1 A	300 RPM	460 W	114 lb (51.7 kg)	-4°F to 131°F (-20°C to 55°C)	78.2 dBA
F-PV2-0602	200–240 VAC, 1 Φ, 50/60 Hz, 10 A	5.6–4.6 A					

¹ 480 V stepdown transformer available.

² Fans are sound tested at maximum speed in a laboratory environment. Actual results in field conditions may vary due to sound reflecting surfaces and environmental conditions.

Airflow Velocity

Measured in feet per minute (meters per minute)

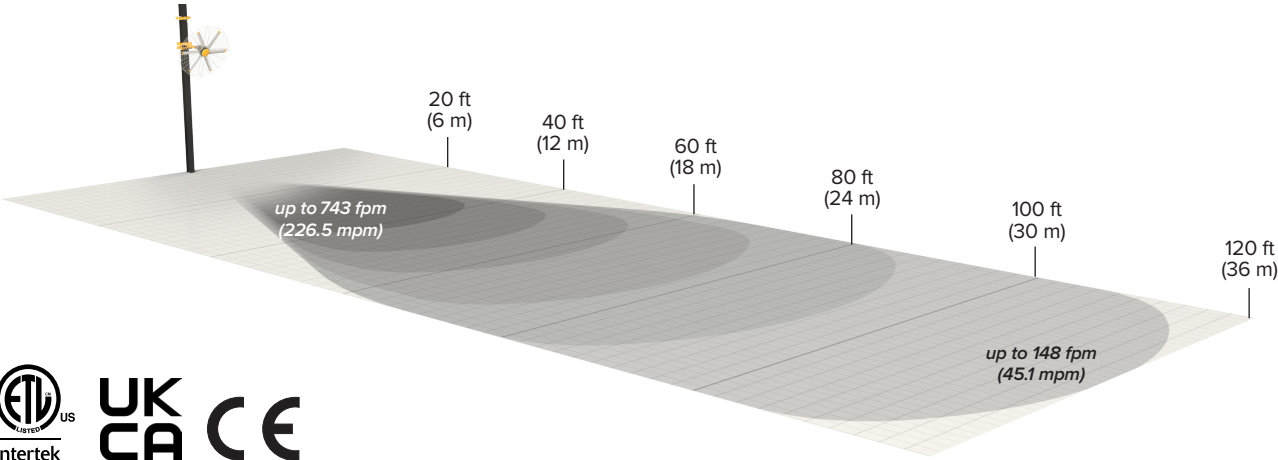

Column-mounted Pivot tested at 10 ft (3 m) above floor with four sensors at varying heights.

Lead times may vary. See full warranty for coverage information.



USA
BIGASSFANS.COM
877-244-3267

CANADA
BIGASSFANS.COM
844-924-4277

AUSTRALIA
BIGASSFANS.COM/AU
1300 244 277

SINGAPORE
BIGASSFANS.COM/SG
65 6709 8500

MALAYSIA
BIGASSFANS.COM/SG
603 5565 0888